



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

MODULE NO.: WF70A7TIFHLHTV#

General Specifications

| Item | Dimension | Unit |
|--------------------------------|-----------------------------------|------|
| Size | 7.0 | inch |
| Dot Matrix | 1024 x RGB x 600(TFT) | dots |
| Module dimension | 165.0(W) x 99.8(H) x 26.3(D) | mm |
| Active area | 154.2144 x 85.92 | mm |
| Dot pitch | 0.1506 x 0.1432 | mm |
| LCD type | TFT, Normally White, Transmissive | |
| View Direction | 12 o'clock | |
| Gray Scale Inversion Direction | 6 o'clock | |
| Aspect Ratio | 16:9 | |
| Backlight Type | LED, Normally White | |
| Controller IC | TFP401 or equivalent | |
| TFT Interface | HDMI (only for DVI) | |
| Touch Panel | Resistive Touch Panel (RTP) | |
| RTP Interface | USB | |
| Surface | Anti-Glare | |

*Color tone slight changed by temperature and driving voltage.

Absolute Maximum Ratings

| Item | Symbol | Min | Typ | Max | Unit |
|-----------------------|--------|-----|-----|-----|------|
| Operating Temperature | TOP | -20 | — | +70 | °C |
| Storage Temperature | TST | -30 | — | +80 | °C |

Electrical Characteristics

Operating conditions:

| Item | Symbol | Condition | Min | Typ | Max | Unit |
|------------------------|--------|-----------|-----|--------|------|------|
| Supply Voltage For LCM | VDD | — | 4.9 | 5 | 5.1 | V |
| Supply Current For LCM | IDD | — | — | 870 | 1200 | mA |
| LED life time | — | — | — | 50,000 | — | Hr |

Interface

LCM PIN Definition(CON6)

| Pin | Symbol | Function |
|-----|--------|--|
| 1 | NC | No connection |
| 2 | 5V | Raspberry Pi:Power 5V |
| 3 | GPIO02 | Raspberry Pi:GPIO02 |
| 4 | 5V | Raspberry Pi:Power 5V |
| 5 | GPIO03 | Raspberry Pi:GPIO03 |
| 6 | GND | Raspberry Pi:GND |
| 7 | GPIO04 | Raspberry Pi:GPIO04 |
| 8 | GPIO14 | Raspberry Pi:GPIO14 |
| 9 | GND | Raspberry Pi:GND |
| 10 | GPIO15 | Raspberry Pi:GPIO15 |
| 11 | GPIO17 | Raspberry Pi:GPIO17 |
| 12 | GPIO18 | Raspberry Pi:GPIO18 (Backlight Enable) |
| 13 | GPIO27 | Raspberry Pi:GPIO27 |
| 14 | GND | Raspberry Pi:GND |
| 15 | GPIO22 | Raspberry Pi:GPIO22 |
| 16 | GPIO23 | Raspberry Pi:GPIO23 |
| 17 | NC | No connection |
| 18 | GPIO24 | Raspberry Pi:GPIO24 |
| 19 | GPIO10 | Raspberry Pi:GPIO10 |
| 20 | GND | Raspberry Pi:GND |
| 21 | GPIO09 | Raspberry Pi:GPIO09 |
| 22 | GPIO25 | Raspberry Pi:GPIO25 |
| 23 | GPIO11 | Raspberry Pi:GPIO11 |
| 24 | GPIO08 | Raspberry Pi:GPIO08 |
| 25 | GND | Raspberry Pi:GND |
| 26 | GPIO07 | Raspberry Pi:GPIO07 |
| 27 | ID_SD | Raspberry Pi:ID_SD |
| 28 | ID_SC | Raspberry Pi:ID_SC |
| 29 | GPIO05 | Raspberry Pi:GPIO05 |
| 30 | GND | Raspberry Pi:GND |

| | | |
|----|--------|---------------------|
| 31 | GPIO06 | Raspberry Pi:GPIO06 |
| 32 | GPIO12 | Raspberry Pi:GPIO12 |
| 33 | GPIO13 | Raspberry Pi:GPIO13 |
| 34 | GND | Raspberry Pi:GND |
| 35 | GPIO19 | Raspberry Pi:GPIO19 |
| 36 | GPIO16 | Raspberry Pi:GPIO16 |
| 37 | GPIO26 | Raspberry Pi:GPIO26 |
| 38 | GPIO20 | Raspberry Pi:GPIO20 |
| 39 | GND | Raspberry Pi:GND |
| 40 | GPIO21 | Raspberry Pi:GPIO21 |

LCM PIN Definition (CON5)

| Pin | Symbol | Function |
|-----|--------|---|
| 1 | 3.3V | TFT Module Power limit can only output 3.3V,100mA |
| 2 | 5V | Raspberry Pi:Power 5V |
| 3 | GPIO02 | Raspberry Pi:GPIO02 |
| 4 | 5V | Raspberry Pi:Power 5V |
| 5 | GPIO03 | Raspberry Pi:GPIO03 |
| 6 | GND | Raspberry Pi:GND |
| 7 | GPIO04 | Raspberry Pi:GPIO04 |
| 8 | GPIO14 | Raspberry Pi:GPIO14 |
| 9 | GND | Raspberry Pi:GND |
| 10 | GPIO15 | Raspberry Pi:GPIO15 |
| 11 | GPIO17 | Raspberry Pi:GPIO17 |
| 12 | GPIO18 | Raspberry Pi:GPIO18 (Backlight Enable) |
| 13 | GPIO27 | Raspberry Pi:GPIO27 |
| 14 | GND | Raspberry Pi:GND |
| 15 | GPIO22 | Raspberry Pi:GPIO22 |
| 16 | GPIO23 | Raspberry Pi:GPIO23 |
| 17 | 3.3V | TFT Module Power limit can only output 3.3V,100mA |
| 18 | GPIO24 | Raspberry Pi:GPIO24 |
| 19 | GPIO10 | Raspberry Pi:GPIO10 |
| 20 | GND | Raspberry Pi:GND |
| 21 | GPIO09 | Raspberry Pi:GPIO09 |

| | | |
|----|--------|---------------------|
| 22 | GPIO25 | Raspberry Pi:GPIO25 |
| 23 | GPIO11 | Raspberry Pi:GPIO11 |
| 24 | GPIO08 | Raspberry Pi:GPIO08 |
| 25 | GND | Raspberry Pi:GND |
| 26 | GPIO07 | Raspberry Pi:GPIO07 |
| 27 | ID_SD | Raspberry Pi:ID_SD |
| 28 | ID_SC | Raspberry Pi:ID_SC |
| 29 | GPIO05 | Raspberry Pi:GPIO05 |
| 30 | GND | Raspberry Pi:GND |
| 31 | GPIO06 | Raspberry Pi:GPIO06 |
| 32 | GPIO12 | Raspberry Pi:GPIO12 |
| 33 | GPIO13 | Raspberry Pi:GPIO13 |
| 34 | GND | Raspberry Pi:GND |
| 35 | GPIO19 | Raspberry Pi:GPIO19 |
| 36 | GPIO16 | Raspberry Pi:GPIO16 |
| 37 | GPIO26 | Raspberry Pi:GPIO26 |
| 38 | GPIO20 | Raspberry Pi:GPIO20 |
| 39 | GND | Raspberry Pi:GND |
| 40 | GPIO21 | Raspberry Pi:GPIO21 |

Note1: The 3.3V supply current is limited; please pay special attention to use

USB

| Pin | Symbol | Function |
|-----|--------|-------------------|
| 1 | 5V | Power Supply (5V) |
| 2 | D- | Data line - |
| 3 | D+ | Data line + |
| 4 | NC | No connection |
| 5 | GND | Power Ground |

POWER JACK


| Pin No. | Symbol | I/O | Function |
|---------|--------|-----|-------------------|
| 1 | 5V | P | Power Supply (5V) |
| 2 | GND | P | Ground |
| 3 | NC | | No connection |

HDMI

| Pin No. | Symbol | I/O | Function |
|---------|--------|-----|---------------------------------|
| 1 | Rx2+ | I | +LVDS Differential Data Input |
| 2 | GND | P | Ground |
| 3 | Rx2- | I | -LVDS Differential Data Input |
| 4 | Rx1+ | I | +LVDS Differential Data Input |
| 5 | GND | P | Ground |
| 6 | Rx1- | I | -LVDS Differential Data Input |
| 7 | Rx0+ | I | +LVDS Differential Data Input |
| 8 | GND | P | Ground |
| 9 | Rx0- | I | -LVDS Differential Data Input |
| 10 | RxC+ | I | +LVDS Differential Clock Input |
| 11 | GND | P | Ground |
| 12 | RxC- | I | -LVDS Differential Clock Input |
| 13-14 | NC | - | No connection |
| 15 | SCL | I/O | DDC(Data Display Channel) Clock |
| 16 | SDA | I/O | DDC(Data Display Channel) Data |
| 17 | GND | P | Ground |
| 18 | 5V | P | Power Supply |
| 19 | Detect | I/O | Hot plug detect |

I: input, O: output, P: Power


Contour Drawing

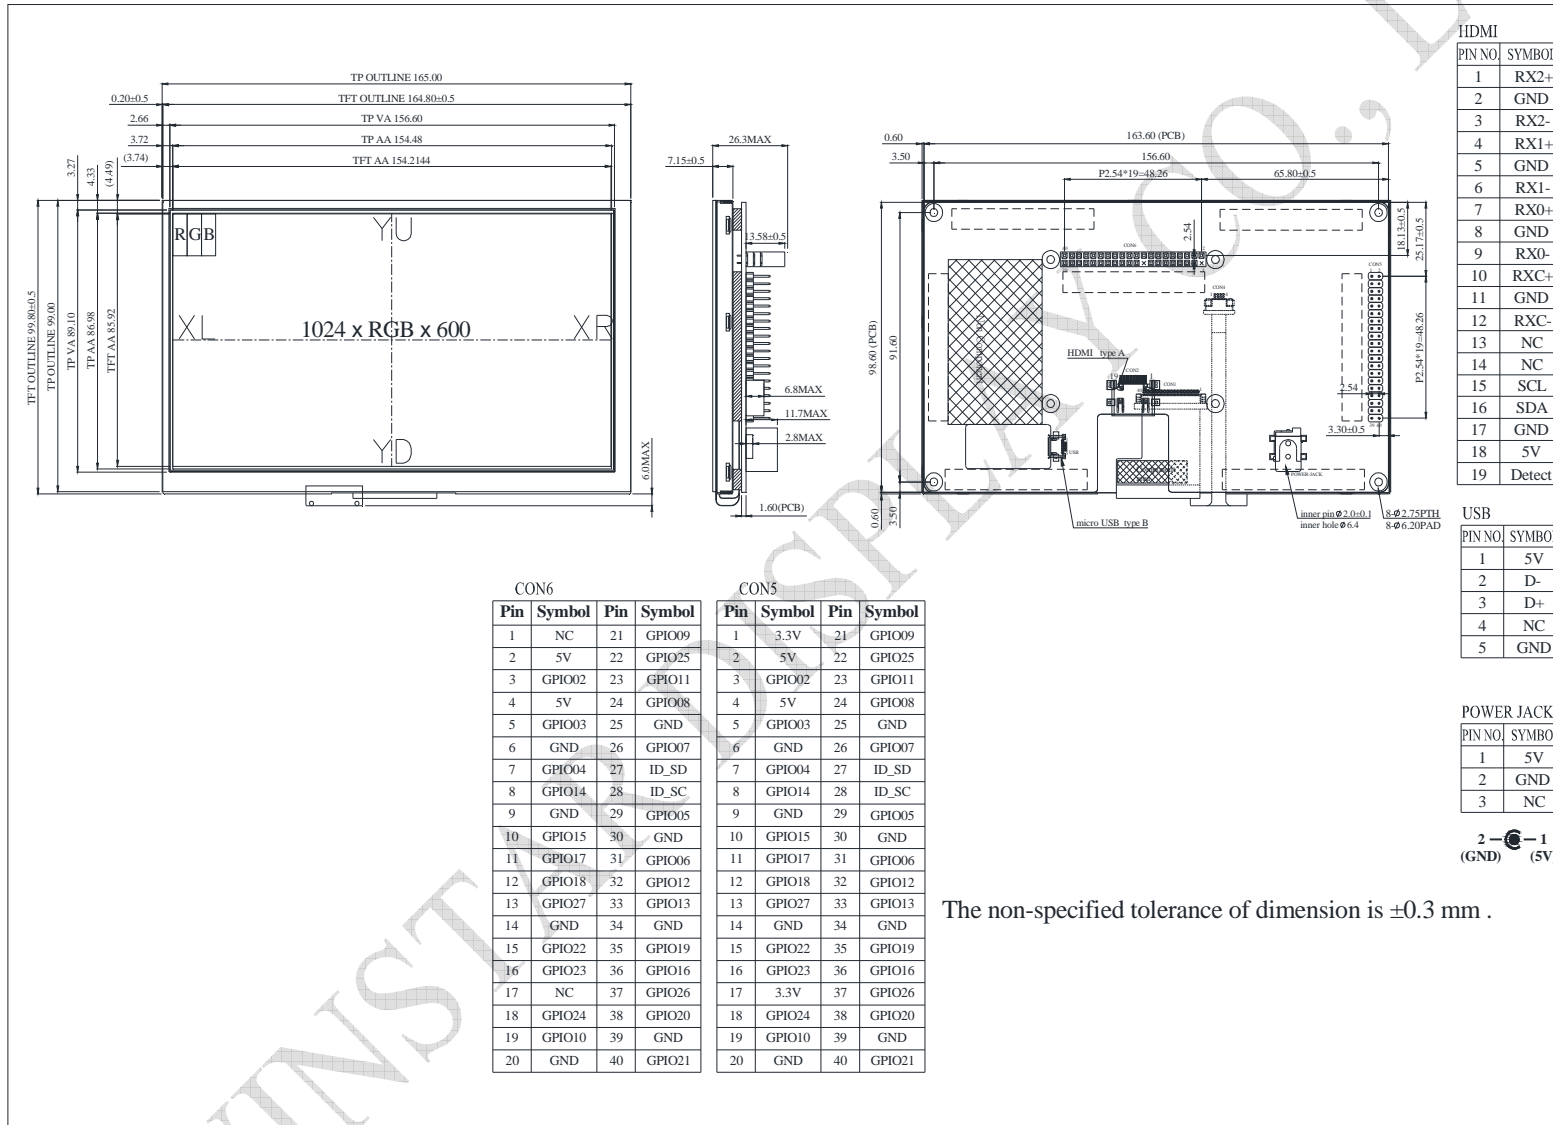

| HDMI | |
|---------|--------|
| PIN NO. | SYMBOL |
| 1 | RX2+ |
| 2 | GND |
| 3 | RX2- |
| 4 | RX1+ |
| 5 | GND |
| 6 | RX1- |
| 7 | RX0+ |
| 8 | GND |
| 9 | RX0- |
| 10 | RXC+ |
| 11 | GND |
| 12 | RXC- |
| 13 | NC |
| 14 | NC |
| 15 | SCL |
| 16 | SDA |
| 17 | GND |
| 18 | 5V |
| 19 | Detect |

| USB | |
|---------|--------|
| PIN NO. | SYMBOL |
| 1 | 5V |
| 2 | D- |
| 3 | D+ |
| 4 | NC |
| 5 | GND |

| POWER JACK | |
|------------|--------|
| PIN NO. | SYMBOL |
| 1 | 5V |
| 2 | GND |
| 3 | NC |



| CON6 | | | | CON5 | | | |
|------|--------|-----|--------|------|--------|-----|--------|
| Pin | Symbol | Pin | Symbol | Pin | Symbol | Pin | Symbol |
| 1 | NC | 21 | GPIO09 | 1 | 3.3V | 21 | GPIO09 |
| 2 | 5V | 22 | GPIO25 | 2 | 5V | 22 | GPIO25 |
| 3 | GPIO02 | 23 | GPIO11 | 3 | GPIO02 | 23 | GPIO11 |
| 4 | 5V | 24 | GPIO08 | 4 | 5V | 24 | GPIO08 |
| 5 | GPIO03 | 25 | GND | 5 | GPIO03 | 25 | GND |
| 6 | GND | 26 | GPIO07 | 6 | GND | 26 | GPIO07 |
| 7 | GPIO04 | 27 | ID_SD | 7 | GPIO04 | 27 | ID_SD |
| 8 | GPIO14 | 28 | ID_SC | 8 | GPIO14 | 28 | ID_SC |
| 9 | GND | 29 | GPIO05 | 9 | GND | 29 | GPIO05 |
| 10 | GPIO15 | 30 | GND | 10 | GPIO15 | 30 | GND |
| 11 | GPIO17 | 31 | GPIO06 | 11 | GPIO17 | 31 | GPIO06 |
| 12 | GPIO18 | 32 | GPIO12 | 12 | GPIO18 | 32 | GPIO12 |
| 13 | GPIO27 | 33 | GPIO13 | 13 | GPIO27 | 33 | GPIO13 |
| 14 | GND | 34 | GND | 14 | GND | 34 | GND |
| 15 | GPIO22 | 35 | GPIO19 | 15 | GPIO22 | 35 | GPIO19 |
| 16 | GPIO23 | 36 | GPIO16 | 16 | GPIO23 | 36 | GPIO16 |
| 17 | NC | 37 | GPIO26 | 17 | 3.3V | 37 | GPIO26 |
| 18 | GPIO24 | 38 | GPIO20 | 18 | GPIO24 | 38 | GPIO20 |
| 19 | GPIO10 | 39 | GND | 19 | GPIO10 | 39 | GND |
| 20 | GND | 40 | GPIO21 | 20 | GND | 40 | GPIO21 |

The non-specified tolerance of dimension is ± 0.3 mm .