

For SRS AirBag


GREEN CAP

105°C
5000hours

Anti-cleaning solvent

For AirBag

- For SRS AirBag application
- Special tolerance at rated capacitance and high capacitance, and good low temperature behavior.
- Guarantees 5000 hours at 105°C.

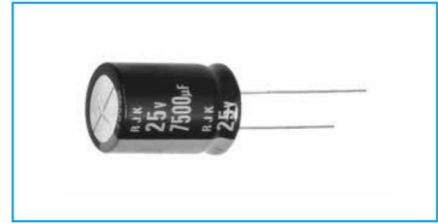


Marking color : White print on a black sleeve

Specifications

Item	Performance		
Category temperature range (°C)	-55 to +105		
Tolerance at rated capacitance (%)	0 to +30 (20°C,120Hz)		
Leakage current (μA) (max.)	0.01CV (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20°C)		
Tangent of loss angle (tanδ)	Rated voltage (V)	25	35
	tanδ (max.)	0.20	0.16
0.02 is added to every 1000μF increase over 1000μF (20°C,120Hz)			
Characteristics at high and low temperature	Rated voltage (V)	25	35
	Impedance ratio (max.)	Z-55°C/Z+20°C	3
(120Hz)			
Endurance (105°C)	Test time	5000 hours	
	Leakage current	The initial specified value or less	
	Percentage of capacitance change	Within ±30% of initial value	
	Tangent of loss angle	300% or less of the initial specified value	
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1		
Applicable standards	JIS C5101 - 1,- 4 (IEC 60384 - 1,- 4)		

Outline Drawing

Unit : mm

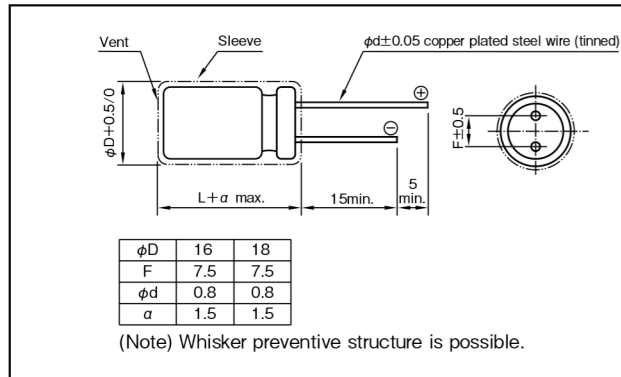

Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k
Rated voltage (V)				
25, 35	0.80	0.85	0.95	1

Product code system : 25V4200μF
(*For automotive: powertrain, safety)

RA*	RJK	422	A	1T	J20		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

- If it is whisker preventive structure, should change "T" into "G".
- For details, refer to the various "Product Code System" pages.

Standard Ratings

Rated voltage (V)		25 (1T)				35 (1G)			
Case $\phi D \times L$ (mm)	Item Size code	Rated capacitance (μF)	ESR (Ω max.)		Rated ripple current (mA rms)	Rated capacitance (μF)	ESR (Ω max.)		Rated ripple current (mA rms)
			20°C	- 40°C			20°C	- 40°C	
16 × 20	J20	4200	0.033	0.095	2250	2500	0.033	0.095	2250
18 × 20	K20	5300	0.029	0.082	2500	3100	0.029	0.082	2500
16 × 25	J25	5900	0.024	0.073	2600	3500	0.024	0.073	2600
18 × 25	K25	7500	0.022	0.063	2800	4500	0.022	0.063	2800
16 × 31.5	J31	8000	0.021	0.052	3200	4700	0.021	0.052	3200
18 × 31.5	K31	9500	0.019	0.046	3500	5600	0.019	0.046	3500
16 × 35.5	J35	10000	0.019	0.045	3500	6000	0.019	0.045	3500
18 × 35.5	K35	11000	0.017	0.040	3700	7100	0.017	0.040	3700
16 × 40	J40	11000	0.017	0.040	3800	6600	0.017	0.040	3800
18 × 40	K40	14000	0.015	0.035	4000	8400	0.015	0.035	4000

(Note) Rated ripple current : 105°C, 100kHz ; ESR : 100kHz