





晶采光電科技股份有限公司  
AMPIRE CO., LTD.

## SPECIFICATIONS FOR LCD MODULE

|                          |                             |
|--------------------------|-----------------------------|
| <b>CUSTOMER</b>          |                             |
| <b>CUSTOMER PART NO.</b> |                             |
| <b>AMPIRE PART NO.</b>   | <b>AM-1280800Q1TZQW-00H</b> |
| <b>APPROVED BY</b>       |                             |
| <b>DATE</b>              |                             |

- Approved For Specifications  
 Approved For Specifications & Sample

AMPIRE CO., LTD.  
4F., No.116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei  
City221, Taiwan (R.O.C.)  
新北市汐止區新台五路一段 116 號 4 樓(東方科學園區 A 棟)  
TEL:886-2-26967269 , FAX:886-2-26967196 or 26967270
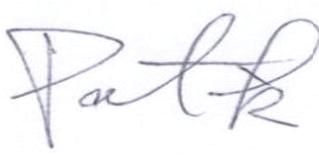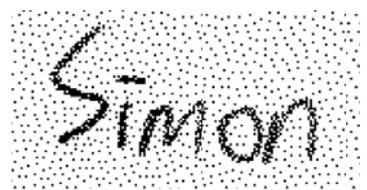
| APPROVED BY   | CHECKED BY   | ORGANIZED BY  |
|---|--|---|
|  |  |  |

## RECORD OF REVISION

| Revision Date | Page | Contents    | Editor |
|---------------|------|-------------|--------|
| 2017/6/7      | --   | New Release | Emil   |

## 1. GENERAL DESCRIPTION

The screen format is intended to support 1280(H) x 800(V)screen and 16.7M(RGB 8-bits)。

### 1.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

| Item                    | Specifications               | unit              |
|-------------------------|------------------------------|-------------------|
| Screen Diagonal         | 12.1                         | inch              |
| Display resolution(dot) | 1280 (RGB) x 800             | dots              |
| Display area            | 261.1 (W) x 163.2 (H)        | mm                |
| Pixel pitch             | 0.204(W) x 0.204 (H)         | mm                |
| Color configuration     | R.G.B Vertical stripe        |                   |
| Overall dimension       | 278.0(W)x184.0(H)x9.5(D)     | mm                |
| Display Mode            | Transmissive, Normally Black |                   |
| Brightness              | 1200                         | cd/m <sup>2</sup> |
| Backlight unit          | LED                          |                   |
| Display color           | 16.7M                        | colors            |
| Electrical Treatment    | 1 channel LVDS               |                   |
| Surface Treatment       | Anti-glare                   |                   |

Note 1: Viewing direction for best image quality is different from TFT definition; there is a 180 degree shift.

Note 2 : Requirements on Environmental Protection: Q/S0002

Note 3 : LCM weight tolerance :  $\pm 5\%$

## 2. Input/Output Terminals

### 2.1 TFT LCD Panel

Mating Connector: 093G30-B0001A-G4(Starconn) or compatible

| Pin | Name   | I/O | Description                                      |
|-----|--------|-----|--|
| 1   | NC     | -   | No connection                                    |
| 2   | NC     | -   | No connection                                    |
| 3   | NC     | -   | No connection                                    |
| 4   | NC     | -   | No connection                                    |
| 5   | NC     | -   | No connection                                    |
| 6   | NC     | -   | No connection                                    |
| 7   | GND    | P   | Power ground                                     |
| 8   | GND    | P   | Power ground                                     |
| 9   | VDD    | P   | Power Supply +3.3V                               |
| 10  | VDD    | P   | Power Supply +3.3V                               |
| 11  | GND    | P   | Power ground                                     |
| 12  | GND    | P   | Power ground                                     |
| 13  | Rxin0- | I   | -LVDS differential data input(R0~R5,G0)          |
| 14  | Rxin0+ | I   | +LVDS differential data input(R0~R5,G0)          |
| 15  | GND    | P   | Power ground                                     |
| 16  | Rxin1- | I   | -LVDS differential data input(G1~G5,B0~B1)       |
| 17  | Rxin1+ | I   | +LVDS differential data input(G1~G5,B0~B1)       |
| 18  | GND    | P   | Power ground                                     |
| 19  | Rxin2- | I   | -LVDS differential data input(B2~B5,-,-,DE)      |
| 20  | Rxin2+ | I   | +LVDS differential data input(B2~B5,-,-,DE)      |
| 21  | GND    | P   | Power ground                                     |
| 22  | RxCLK- | I   | -LVDS differential data input                    |
| 23  | RxCLK+ | I   | +LVDS differential data input                    |
| 24  | GND    | P   | Power ground                                     |
| 25  | Rxin3- | I   | -LVDS differential data input(R6~R7,G6~G7,B6~B7) |
| 26  | Rxin3+ | I   | +LVDS differential data input(R6~R7,G6~G7,B6~B7) |
| 27  | GND    | P   | Power ground                                     |
| 28  | NC     | -   | No Connection                                    |
| 29  | GND    | P   | Power ground                                     |
| 30  | GND    | P   | Power ground                                     |

Note: I/O definition:

I----Input P----Power/Ground

### 3 Absolute Maximum Ratings

#### 3.1 Driving TFT LCM Panel

GND=0V

| Item                          | Symbol | MIN  | MAX  | Unit             | Remark           |
|-------------------------------|--------|------|------|------------------|------------------|
| Voltage Input                 | Vin    | -0.5 | 5.0  | V                | Note1            |
| Operation Temperature         | TOP    | -20  | 70   | °C               |                  |
| Storage Temperature           | TST    | -30  | 80   | °C               |                  |
| LED backlight power supply    | VF     | -0.3 | 22   | V                |                  |
| LED backlight driving current | IF     | -    | 600  | mA               |                  |
| Relative Humidity<br>(Note2)  | RH     | --   | ≤ 95 | %                | Ta ≤ 40°C        |
|                               |        | --   | ≤ 85 | %                | 40°C < Ta ≤ 50°C |
|                               |        | --   | ≤ 55 | %                | 50°C < Ta ≤ 60°C |
|                               |        | --   | ≤ 36 | %                | 60°C < Ta ≤ 70°C |
|                               |        | --   | ≤ 24 | %                | 70°C < Ta ≤ 80°C |
| Absolute Humidity             | AH     | --   | ≤ 70 | g/m <sup>3</sup> | Ta > 70°C        |

Table 3.1 absolute maximum rating

Note1: Input voltage include Rxin0-/+, Rxin1-/+, Rxin2-/+, Rxin3-/+, RxCLK-/+, SEL6/8,VDD.

Note2: Ta means the ambient temperature. It is necessary to limit the relative humidity to the specified temperature range. Condensation on the module is not allowed.

## 4. ELECTRICAL CHARACTERISTICS

### 4.1 Driving TFT LCD Panel

VCC=3.3V,GND=0V, Ta=25°C

| Item                                 | Symbol            | Min              | Typ  | Max | Units | Remark |
|--------------------------------------|-------------------|------------------|------|-----|-------|--------|
| Power supply Voltage                 | VDD               | 3.0              | 3.3  | 3.6 | V     |        |
| Power supply ripple                  | V <sub>P-P</sub>  | -                | -    | 100 | mV    |        |
| Power supply current                 | I <sub>DD</sub>   | -                | TBD  | -   | mA    |        |
| Power consumption                    | P                 | -                | TBD  | -   | mW    | Note 1 |
| Differential input voltage           | V <sub>id</sub>   | 200              | -    | 600 | mV    |        |
| Differential input common voltage    | V <sub>cm</sub>   | -                | 1.2  | -   | V     |        |
| Differential input threshold voltage | Low level         | V <sub>T</sub> L | -100 | -   | -     | mV     |
|                                      | Hight level       | V <sub>T</sub> H | -    | -   | 100   | mV     |
| Inrush Current                       | I <sub>rush</sub> | --               | --   | 1.5 | A     |        |

Table 4.1 LCD module electrical characteristics

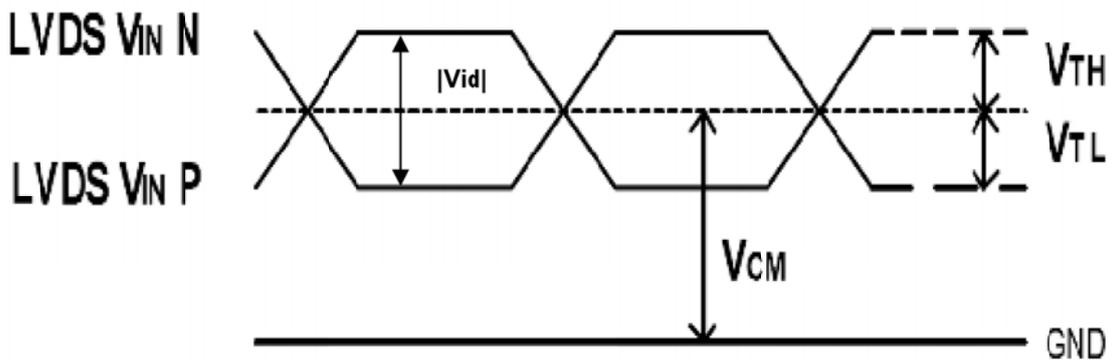



Fig 4.1 LVDS characteristics

Note1: To test the current dissipation, using the “white pattern” shown.

## 4.2 Driving Backlight

Input signals shall be low or Hi-Z state when VDD is off.

| Item                          | Symbol | Min. | Typ.  | Max | Unit | Remark |
|-------------------------------|--------|------|-------|-----|------|--------|
| LED Backlight forward voltage | VF     | -    | 18    | 20  | V    |        |
| LED Backlight forward current | IF     | -    | -     | 600 | mA   |        |
| Backlight power consumption   | PLED   | -    | 10.8  | -   | W    |        |
| Operating Life Time           | -      | -    | T.B.D | -   | hrs  | Note 1 |

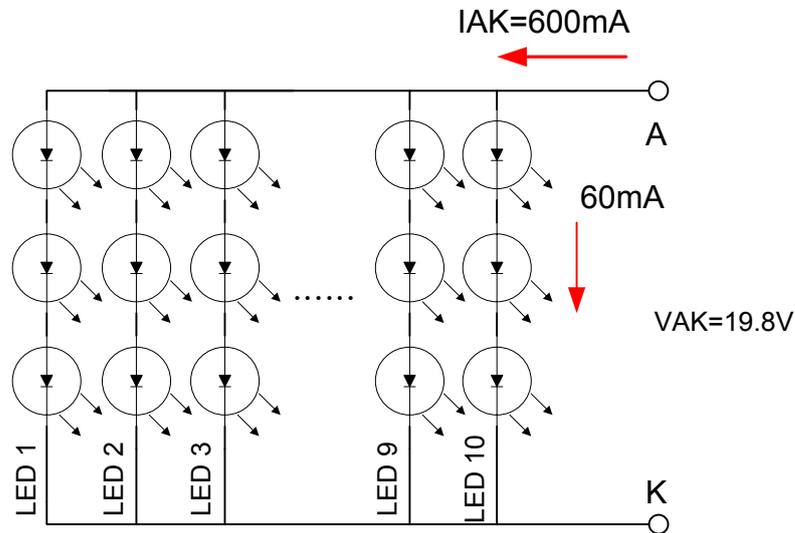

Note 1: Optical performance should be evaluated at  $T_a = 25^\circ\text{C}$  only.

Note 2: If LED is driven by high current, high ambient temperature & humidity condition.

The life time of LED will be reduced.

Note 3: Operating life means brightness goes down to 50% of initial brightness. Typical operating life time is estimated data.

## 5.1 LVDS signal timing characteristics

VCC=3.3V, GND=0V, Ta=25°C

| Parameter               | Symbol  | Min  | Typ  | Max | Unit |
|-------------------------|---------|------|------|-----|------|
| CLK frequency           | $1/t_c$ | 67   | 71   | 75  | MHz  |
| Horizontal display area | thd     | -    | 1280 | -   | tc   |
| Horizontal period       | th      | 1290 | 1440 | -   | tc   |
| Vertical display area   | tvd     | -    | 800  | -   | th   |
| Vertical period         | tv      | 810  | 823  | -   | th   |
| Frame Rate              | F       | -    | 60   | -   | HZ   |

## 5.2 Input Clock and Data timing Diagram:

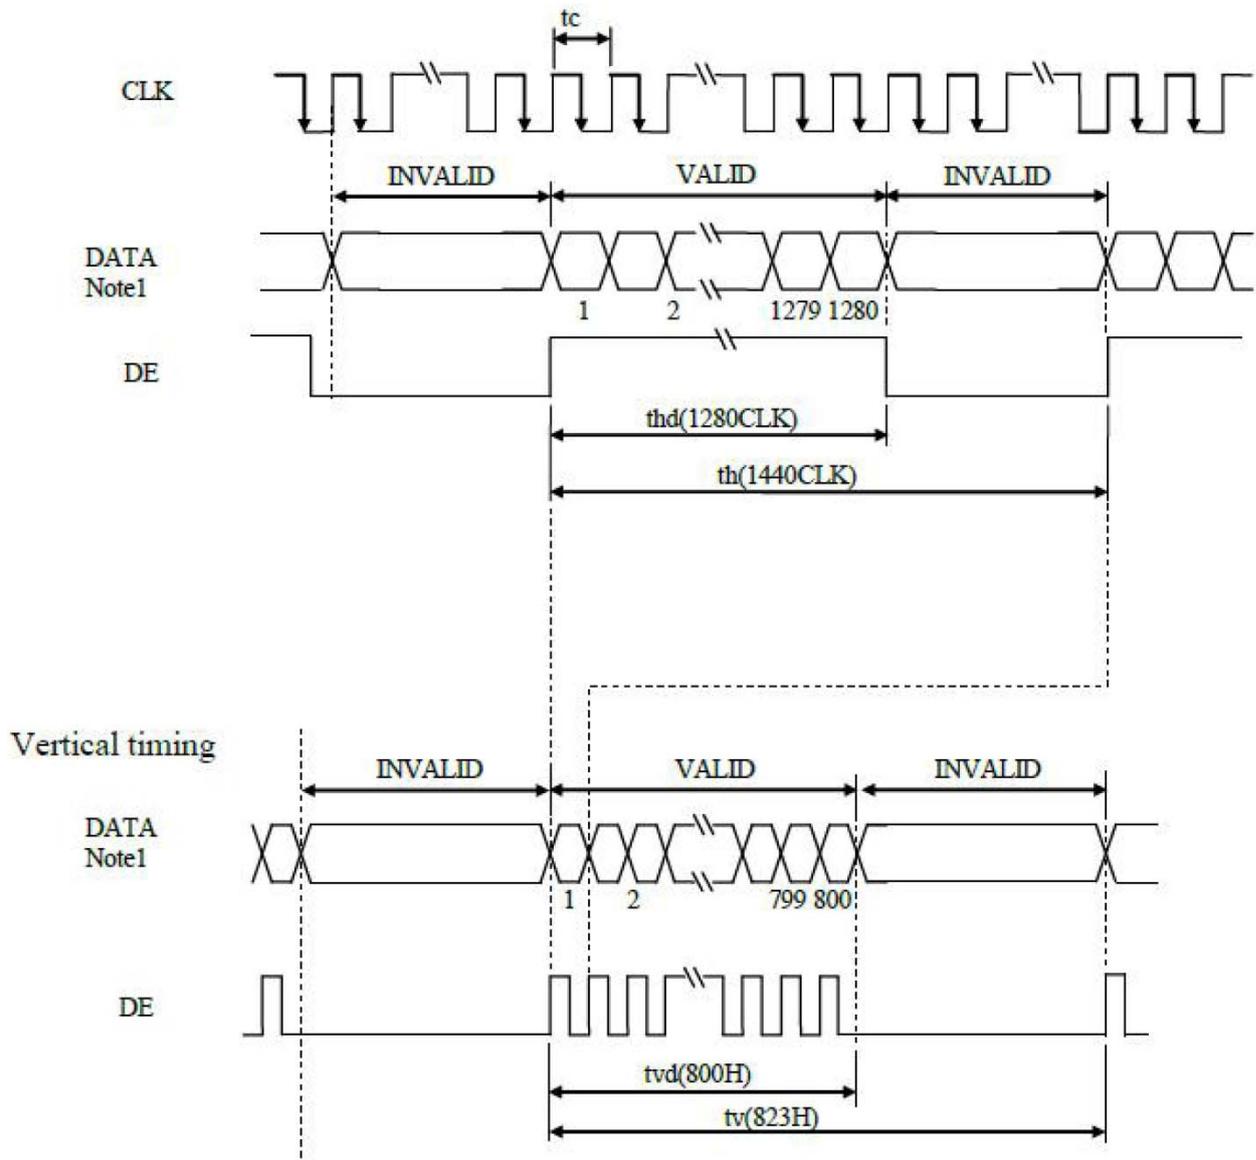


Figure 5.2 Input signal data timing

## 5.3 LVDS data input format

8-bit mode data input

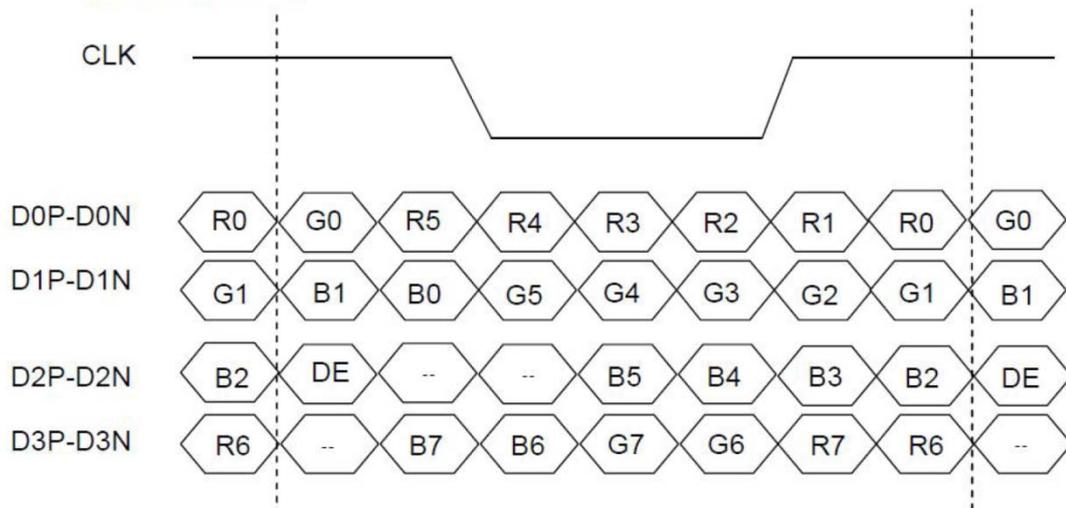


Figure 5.3 LVDS data input format

## 5.4 Power On/Off Sequence

| Item                          | Symbol | Min | Typ | Max | Unit |
|-------------------------------|--------|-----|-----|-----|------|
| VDD on to VDD stable          | Tp1    | 0.5 | -   | 10  | ms   |
| VDD stable to signal on       | Tp2    | 0   | -   | 50  | ms   |
| Signal on to VLED_EN on       | Tp3    | 200 | -   | -   | ms   |
| PWM on to VLED_EN on          | Tp4    | 0   | -   | 200 | ms   |
| VLED to PWM on                | Tp5    | 10  | -   | -   | ms   |
| VLED on to VELD stable        | Tp6    | 0.5 | -   | 10  | ms   |
| VDD off time                  | Tp7    | 0   | -   | 10  | ms   |
| VDD off to next VDD on        | Tp8    | 500 | -   | -   | ms   |
| Signal off before VDD off     | Tp9    | 0   | -   | 50  | ms   |
| VLED_EN off before signal off | Tp10   | 200 | -   | -   | ms   |
| VLED_EN off before PWM off    | Tp11   | 0   | -   | 200 | ms   |
| PWM off before VLED off       | Tp12   | 10  | -   | -   | ms   |

Table 5.4 Power on/off sequence

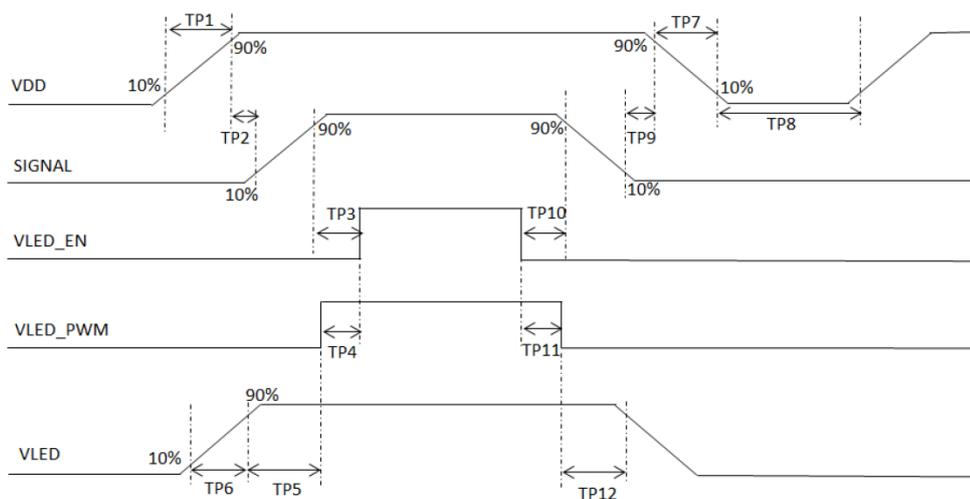


Figure 5.4 Interface power on/off sequence

## 6 Optical specification

### 6.1 Optical characteristic of the LCD


| Item           | Symbol     | Condition            | Min.               | Typ.  | Max.  | Unit              | Remark           |                  |
|----------------|------------|----------------------|--------------------|-------|-------|-------------------|------------------|------------------|
| View Angles    | $\theta T$ | $CR \geq 10$         | 75                 | 85    | --    | Degree            | Note 2           |                  |
|                | $\theta B$ |                      | 75                 | 85    | --    |                   |                  |                  |
|                | $\theta L$ |                      | 75                 | 85    | --    |                   |                  |                  |
|                | $\theta R$ |                      | 75                 | 85    | --    |                   |                  |                  |
| Contrast Ratio | CR         | $\theta = 0^\circ$   | 800                | 1000  | --    |                   | Note 1<br>Note 3 |                  |
| Response Time  | $T_{ON}$   | $25^\circ C$         | --                 | 12    | --    | ms                | Note 1<br>Note 4 |                  |
|                | $T_{OFF}$  |                      | --                 | 13    | --    |                   |                  |                  |
| Chromaticity   | White      | X                    | Backlight<br>is ON | 0.266 | 0.316 | 0.366             | --               | Note 1<br>Note 5 |
|                |            | Y                    |                    | 0.300 | 0.350 | 0.400             |                  |                  |
|                | Red        | X                    |                    | 0.517 | 0.567 | 0.617             |                  |                  |
|                |            | Y                    |                    | 0.299 | 0.349 | 0.399             |                  |                  |
|                | Green      | X                    |                    | 0.308 | 0.358 | 0.408             |                  |                  |
|                |            | Y                    |                    | 0.507 | 0.557 | 0.607             |                  |                  |
|                | Blue       | X                    |                    | 0.116 | 0.166 | 0.216             |                  |                  |
|                |            | Y                    |                    | 0.103 | 0.153 | 0.203             |                  |                  |
| Uniformity     | U          |                      | 70                 | 75    | --    | %                 | Note 1<br>Note 6 |                  |
| NTSC           |            |                      | 35                 | 40    | --    | %                 | Note 5           |                  |
| Luminance      | L          | VF=19.8V<br>IF=600mA | 960                | 1200  | --    | cd/m <sup>2</sup> | Note 1<br>Note 7 |                  |

Test Conditions:

1. The ambient temperature is  $25 \pm 2^\circ C$ . humidity is  $65 \pm 7\%$
2. The test systems refer to Note1 and Note 2.

Note 1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

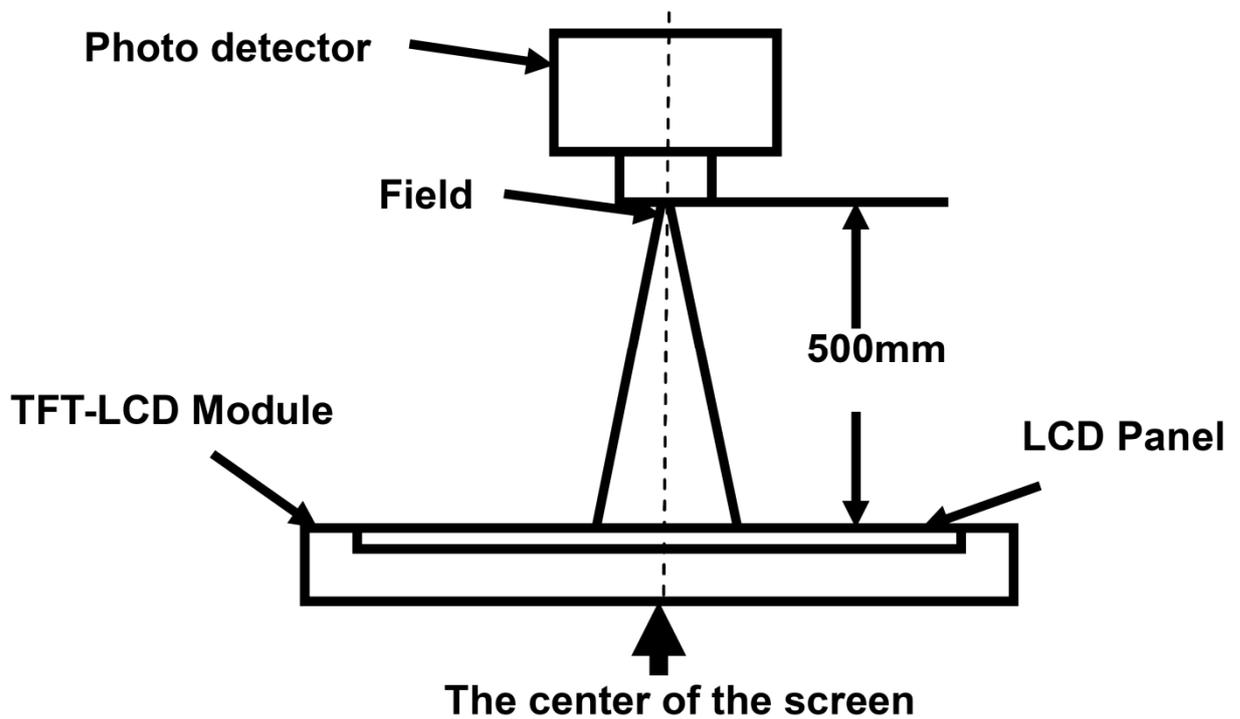

Note 2: Definition of viewing angle range and measurement system.

viewing angle is measured at the center point of the LCD by CONOSCOPE (ergo-80).

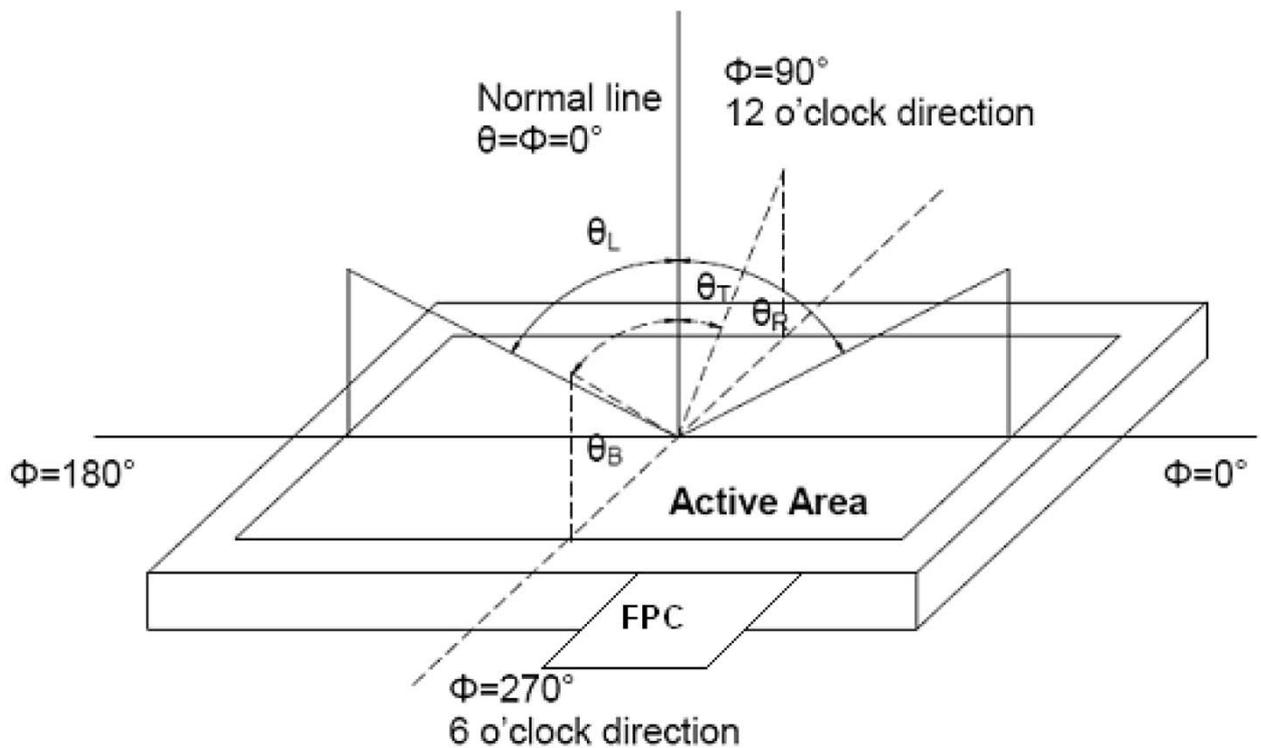


Fig. 1 Definition of viewing angle

Note 3: Definition of contrast ratio

$$\text{Contrast ratio(CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$

“White state “: The state is that the LCD should driven by  $V_{\text{white}}$ .


“Black state”: The state is that the LCD should driven by  $V_{\text{black}}$ .

$V_{\text{white}}$ : To be determined

$V_{\text{black}}$ : To be determined.

Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time ( $T_{\text{ON}}$ ) is the time between photo detector output intensity changed from 90% to 10%. And fall time ( $T_{\text{OFF}}$ ) is the time between photo detector output intensity changed from 10% to 90%.

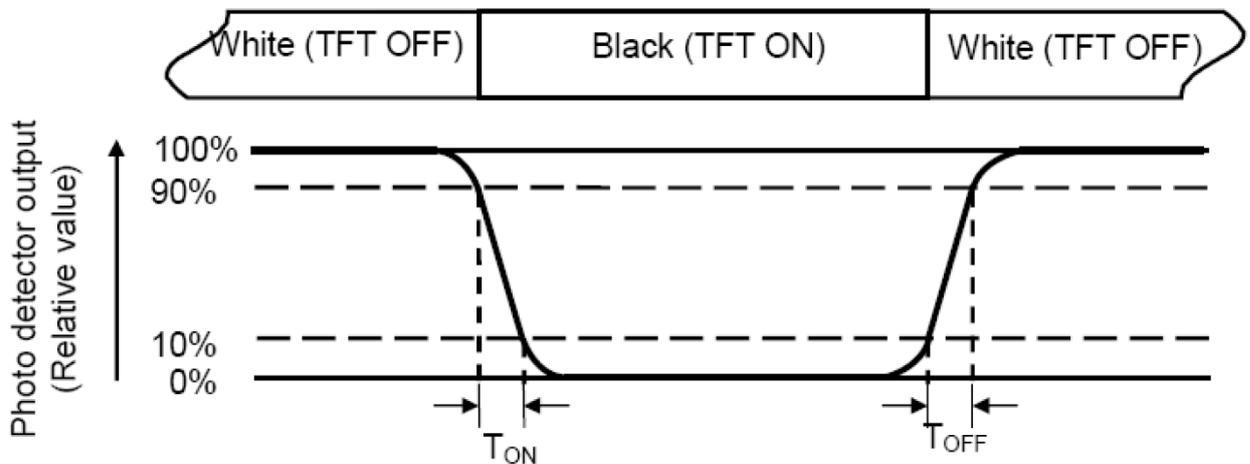

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity(U)} = \frac{L_{\text{min}}}{L_{\text{max}}}$$

L-----Active area length W----- Active area width

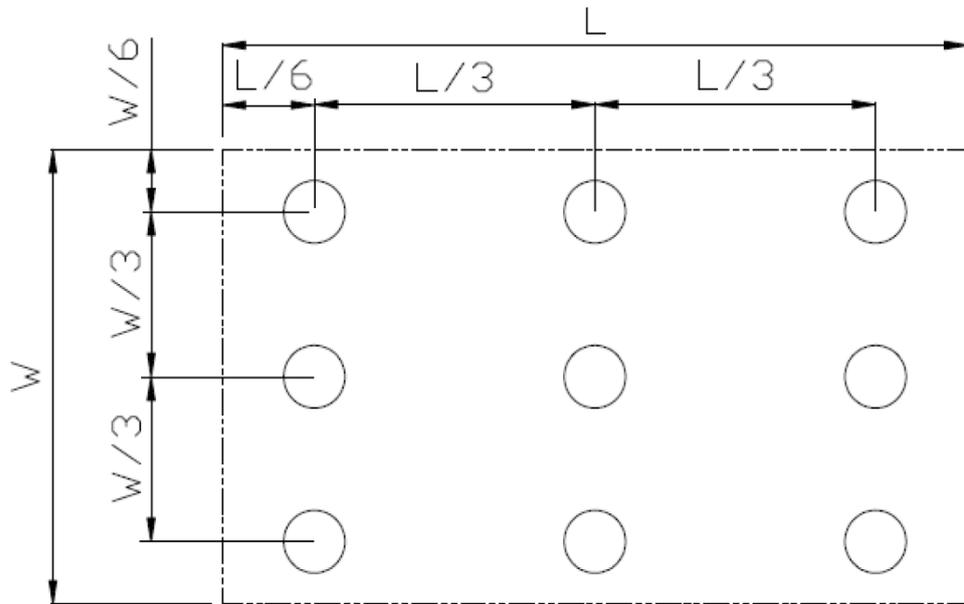


Fig. 2 Definition of uniformity

$L_{max}$ : The measured maximum luminance of all measurement position.

$L_{min}$ : The measured minimum luminance of all measurement position.

Note 7: Definition of Luminance :

Measure the luminance of white state at center point.

## 7 Reliability Test Items

| Test Item                                | Test Conditions   | Note |
|--|---|------|
| High Temperature Operation               | Ts = 70°C , t=240 hrs   |      |
| Low Temperature Operation                | Ta = -20°C , t=240 hrs  |      |
| High Temperature Storage                 | Ta = 80°C , t=240 hrs   | 1,2  |
| Low Temperature Storage                  | Ta = -30°C , t=240 hrs  | 1,2  |
| Storage at High Temperature and Humidity | Ta = 60°C, 90% RH , 240 hrs   | 1,2  |
| Thermal Shock Test                       | -30°C (30min) ~ 80°C (30min)<br>Change time:5min, 100 cycles  | 1,2  |
| Vibration Test (Packing)                 | Frequency range:10~55Hz,<br>Stroke:1.5mm<br>Sweep:10Hz ~ 55Hz ~ 10Hz<br>2hours for each direction of<br>X.Y.Z (6 hours total) | 2    |

Note 1 : Ts is the temperature of panel's surface.

Note 2 : Ta is the ambient temperature of sample.

## 8 USE PRECAUTIONS

### 8.1 Handling Precautions

- 8.1.1. The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- 8.1.2. If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.
- 8.1.3. Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- 8.1.4. The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- 8.1.5. If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:
  - Isopropyl alcohol
  - Ethyl alcoholSolvents other than those mentioned above may damage the polarizer. Especially, do not use the following:
  - Water
  - Ketone
  - Aromatic solvents
- 8.1.6. Do not attempt to disassemble the LCD Module.
- 8.1.7. If the logic circuit power is off, do not apply the input signals.
- 8.1.8. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
  - 8.1.8.1. Be sure to ground the body when handling the LCD Modules.
  - 8.1.8.2. Tools required for assembly, such as soldering irons, must be properly ground.
  - 8.1.8.3. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
  - 8.1.8.4. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

## **8.2 Storage Precautions**

8.2.1. When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

8.2.2. The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:

Temperature : 0°C ~ 40°C Relatively humidity: ≤80%

8.2.3. The LCD modules should be stored in the room without acid, alkali and harmful gas.

## **8.3 Transportation Precautions**

The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.

## **8.4 Other**


AMIPRE will provide one year warrantee for all products and three months warrantee for all repairing products.

Do not keep the LCD at the same display pattern continually. The residual image will happen and it will damage the LCD. Please use screen saver.



| REV | REVISION RECORD | DATE NAME     |
|-----|-----------------|---------------|
| 0   | NEW RELEASE     | 16-07-17 SNOW |

| CN1       |           |
|-----------|-----------|
| 1 NC      | 16 RXIN1- |
| 2 NC      | 17 RXIN1+ |
| 3 NC      | 18 GND    |
| 4 NC      | 19 RXIN2- |
| 5 NC      | 20 RXIN2+ |
| 6 NC      | 21 GND    |
| 7 GND     | 22 RXCLK- |
| 8 GND     | 23 RXCLK+ |
| 9 VDD     | 24 GND    |
| 10 VDD    | 25 RXIN3- |
| 11 GND    | 26 RXIN3+ |
| 12 GND    | 27 GND    |
| 13 RXINO- | 28 NC     |
| 14 RXINO+ | 29 GND    |
| 15 GND    | 30 GND    |

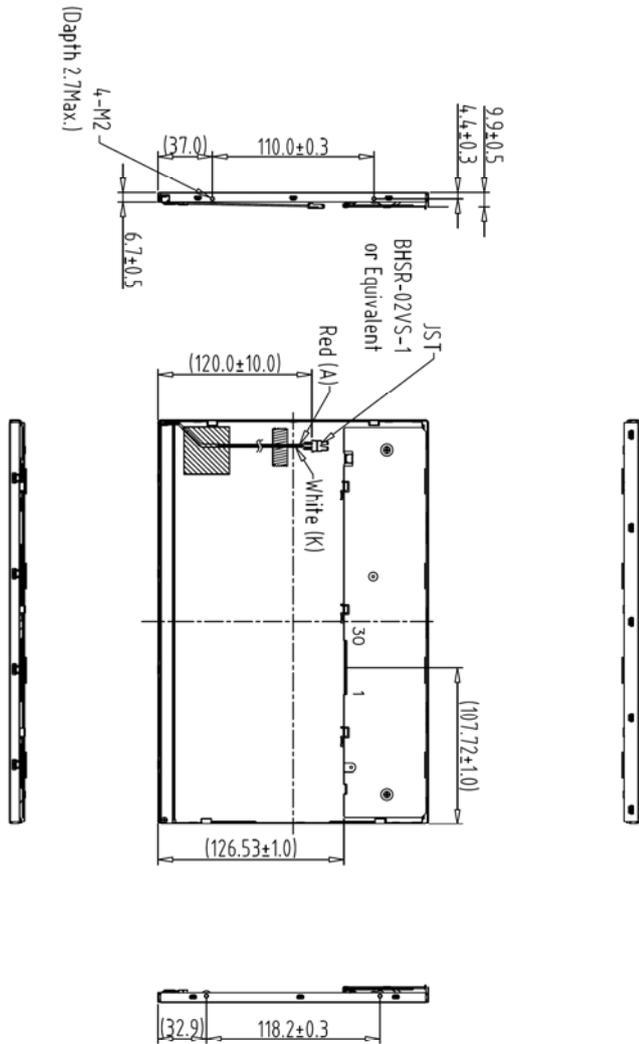

Back view

- Note:
1. Unless indicated, Tolerance " $\pm 0.5$ "
  2. UV Glue For OLB Protection.
  3. LCD 1280x800 (R,G,B) TFT LCD => 12.1" TFT LCD
  4. Connector : 093G30-B0001A-G4 (Starconn) or Equivalent.  
Matching Connector: JAE FI-X3OCL or Equivalent.

| 1 | 200nits | 7  | TOLERANCE GRADE(±) | A | B | DIM.      | MM    | DWG.  | SNOW | DATE     | TITLE                                  |
|---|---------|----|--------------------|---|---|-----------|-------|-------|------|----------|--|
| 2 |         | 8  |                    |   |   | IE NO.    |       | CHK.  |      | 06-07-17 | <br>晶采光電科技<br>1280800Q1<br>(12.1") IPS |
| 3 |         | 9  |                    |   |   | PARTS NO. | LCM-1 | APPD. |      | DATE     |  |
| 4 |         | 10 |                    |   |   | 128080001 |       |       |      | DATE     | *170629MA                              |
| 5 |         | 11 |                    |   |   |           |       |       |      | DATE     | SHEET 1 OF 1                           |
| 6 |         | 12 |                    |   |   |           |       |       |      | DATE     |  |