# WINSTAR Display

# **OLED SPECIFICATION**

Model No:


### WEN025664B-CTP

# **General Specification**

Item	Item Dimension		
Dot Matrix	256 x 64 Dots	_	
Module dimension	89.2 × 44.0 × 7.98	mm	
Active Area	76.78×19.18	mm	
Pixel Size	0.278×0.278	mm	
Pixel Pitch	0.3×0.3	mm	
Display Mode	Passive Matrix		
Display Color	Monochrome		
Drive Duty	1/64 Duty		
Gray Scale	4 bits		
OLED IC	SSD1322 (COF)		
OLED Interface	6800, 8080, SPI		
Size	3.12 inch		

CTP IC	FT6336U
Detect Point	1
CTP Interface	I2C
Surface	Normal Glare

### **Contour Drawing & Block Diagram**

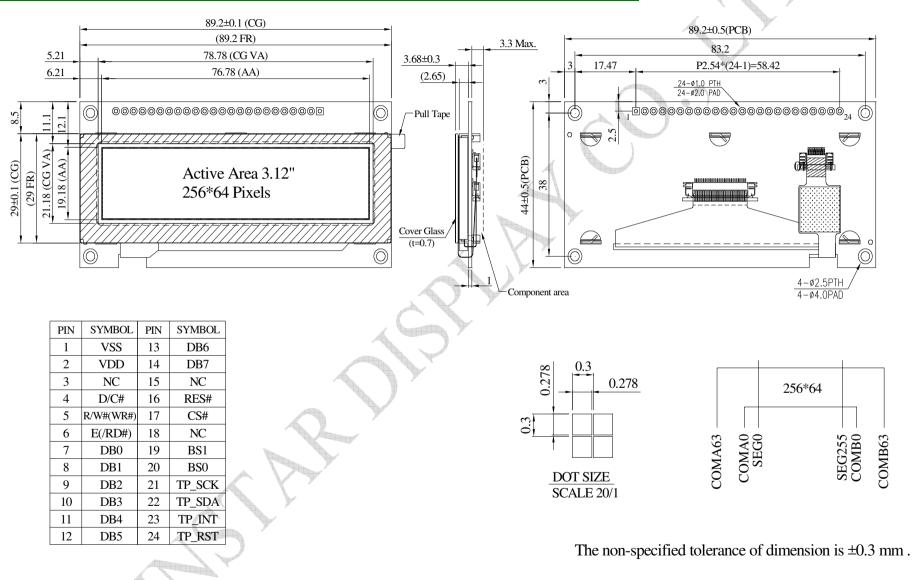

**WINSTAR** 

# **Interface Pin Function**

Pin Number	Symbol	I/O	Function
1	VSS	Р	Ground.
2	VDD	Р	<b>Power Supply for Core Logic Circuit</b> Power supply pin for core logic operation. A capacitor is required to connect between this pin and VSS
3	N.C.	Р	<b>Reserved Pin</b> The N.C. pin between function pins are reserved for compatible and flexible design.
4	D/C#	I	<b>Data/Command Control</b> This pin is Data/Command control pin connecting to the MCU. When the pin is pulled HIGH, the content at D[7:0] will be interpreted as data. When the pin is pulled LOW, the content at D[7:0] will be interpreted as command.
5	R/W# (WR#)	Ι	<b>Read/Write Select or Write</b> This pin is MCU interface input. When interfacing to a 68XX-series microprocessor, this pin will be used as Read/Write (R/W#) selection input. Pull this pin to "High" for read mode and pull it to "Low" for write mode. When 80XX interface mode is selected, this pin will be the Write (WR#) input. Data write operation is initiated when this pin is pulled low and the CS# is pulled low. When serial mode is selected, this pin must be connected to VSS.
6	E/RD#	K	Read/Write Enable or Read This pin is MCU interface input. When interfacing to a 68XX-series microprocessor, this pin will be used as the Enable (E) signal. Read/write operation is initiated when this pin is pulled high and the CS# is pulled low. When connecting to an 80XX-microprocessor, this pin receives the Read (RD#) signal. Data read operation is initiated when this pin is pulled low and CS# is pulled low. When serial mode is selected, this pin must be connected to VSS.
7~14	DB0 DB1 DB2 DB3 DB4 DB5 DB6 DB7	I/O	Host Data Input/Output Bus These pins are 8-bit bi-directional data bus to be connected to the microprocessor's data bus. When serial mode is selected, D1 will be the serial data input SDIN and D0 will be the serial clock input SCLK.
15	NC	Р	<b>Reserved Pin</b> The N.C. pin between function pins are reserved for compatible and flexible design.

16	RES#	Ι	This pin is reset signal input. When the pin is pulled LOW, initialization of the chip is executed. Keep this pin pull HIGH during normal operation.			
17	CS#	Ι	<b>Data/Command Control</b> This pin is the chip select input connecting to the MCU. The chip is enabled for MCU communication only when CS# is pulled LOW.			
18	NC	Р	<b>Reserved Pin</b> The N.C. pin between function pins are reserved for compatible and flexible design.			
19	BS1		Communicating Protocol Select			
20	BS0	Ι	BS[1:0] Bus Interface Selection   00 4 line SPI   01 3 line SPI   10 8-bit 8080 parallel   11 8-bit 6800 parallel   Note   (1) 0 is connected to VSS   (2) 1 is connected to VDD			
21	TP_SCK	Ι	I2C clock input			
22	TP_SDA	Ι	I2C data input and output			
23	TP_INT	Ι	External interrupt to the host			
24	TP_RST	Ι	External Reset, Low is active			

### **Absolute Maximum Ratings**

#### **Absolute Maximum Ratings**

Parameter	Symbol	Min	Max	Unit
Supply Voltage for Display	VDD	-0.3	4	v
Operating Temperature	TOP	-20	70	°C
Storage Temperature	TSTG	-30	80	°C

ຯ

#### **Electrical Characteristics**

#### **DC Electrical Characteristics**

Item	Symbol	Condition	Min	Тур	Max	Unit
Supply Voltage for Logic	VDD		2.8	3.0	3.3	V
High Level Input	VIH		0.8×VDD	_	VDD	V
Low Level Input	VIL	) –	0	_	0.2×VDD	V
High Level Output	VOH	_	0.9×VDD		VDD	V
Low Level Output	VOL		0	_	0.1×VDD	V
50% Check Board operating Current	IDD	VDD =3V	_	150	300	mA