

晶采光電科技股份有限公司 AMPIRE CO., LTD.

SPECIFICATIONS FOR LCD MODULE

| CUSTOMER | |
|-------------------|---------------------|
| CUSTOMER PART NO. | |
| AMPIRE PART NO. | AM-800480I2TZQW-00H |
| APPROVED BY | |
| DATE | |

☐ Preliminary Specification

☐ Formal Specification

AMPIRE CO., LTD.

4F., No.116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City221, Taiwan (R.O.C.)

新北市汐止區新台五路一段 116號 4樓(東方科學園區 A棟)

TEL:886-2-26967269 , FAX:886-2-26967196 or 26967270

| Approved by | Checked by | Organized by |
|-------------|------------|--------------|
| Patrick | Simon | Mantle |

This Specification is subject to change without notice.

Date: 2021/01/13 AMPIRE CO., LTD. 1

RECORD OF REVISION

| Revision Date | Page | Contents | Editor |
|------------------|------|-------------|--------|
| 2021/01/13 | | New Release | Mantle |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

1. General Specifications

7 inch Amorphous-TFT-LCD (Thin Film Transistor Liquid Crystal Display) module.

This module is composed of a 7" TFT-LCD panel, TFT driving PCBA, and backlight unit.

1.1 Features

(1) Construction: 7" a-Si TFT active matrix, White LED Backlight.

(2) Resolution (pixel): 800(R.G.B) X480


(3) Number of the Colors: 16.7M colors (R, G, B 8 bit digital each)


(4) LCD type: Transmissive, normally Black

(5) Interface: LVDS

1.2 Product Summary

| NO | Item | Specification | Remark |
|----|-------------------|---------------------------|-------------------|
| 1 | LCD Size | 7.0 inch (Diagonal) | |
| 2 | Resolution | 800 x 3 (RGB) x 480 | |
| 4 | Pixel pitch | 0.1905 (W) x 0.1905(H) mm | |
| 5 | Active area | 152.4(W) x 91.44(H) mm | |
| 7 | Color arrangement | RGB-stripe | |
| 8 | Luminance | 1000 cd/m2 | cd/m ² |

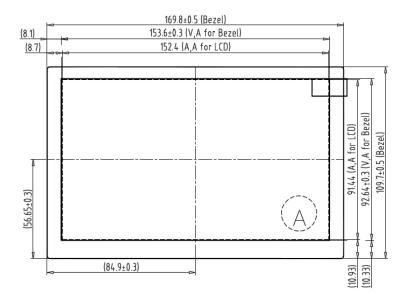

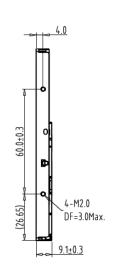

2. Absolute Maximum Ratings

| Item | Symbol | Min. | Max. | Unit | Remakes |
|--------------------------------|-----------------|------|---------------------|-------------------------|---------|
| Supply Voltage | V_{DD} | -0.3 | 3.6 | V | - |
| Supply Voltage | V_{LED} | -0.3 | 15 | V | |
| Input Voltage of Logic | Vı | -0.3 | V _{DD+0.3} | V | Note 1 |
| DIM frequency Input Voltage | VPDIM | -0.3 | 7 | V | |
| Operating Temperature | T _{OP} | -30 | 70 | $^{\circ}\!\mathbb{C}$ | Note 2 |
| Storage Temperature | T _{ST} | -30 | 80 | $^{\circ}\! \mathbb{C}$ | Note 2 |

- Note 1: The rating is defined for the signal voltages of the interface such as CLK and pixel data pairs.
- Note2: The maximum rating is defined as above based on the chamber temperature, which might be different from ambient temperature after assembling the panel into the application. Moreover, some temperature-related phenomenon as below needed to be noticed:

 - -Operating under high temperature will shorten LED lifetime.

3. Electrical Characteristics

3.1 Recommended Operating Condition

| Item | | Symbol | Min. | Тур. | Max. | Unit | Note |
|-----------------------------------|---------------------------------------|-----------------|------|-------|------|------|----------------------|
| LCD Supply Volta | ige | V_{DD} | 3.0 | 3.3 | 3.6 | V | - |
| LCD Supply Curre | ent | I _{DD} | - | 180 | - | | (1) |
| Power Supply Voltag | ge For | VL | 10.8 | 12.0 | 13.2 | V | (1) 100%duty |
| Power Supply Curre LED Driver | Power Supply Current For LED Driver | | - | (330) | - | mA | VLED=12V 100%duty |
| DIM frequency | | f_{PWM} | 100 | 500 | 1000 | Hz | Note2 |
| Dealdight ON OFF | HIGH | BLEN | 2.5 | | VL | V | |
| Backlight ON-OFF | LOW | | 0 | | 0.4 | V | |
| DIM frequency Input | HIGH | VPDIM | 2.5 | | 5.5 | V | |
| Voltage | LOW | VPDIM | 0 | | 0.3 | V | |
| LVDS RECEIVER DC SPECIFICATIONS | | | | | | | |
| Differential Input F Threshold | Differential Input High Threshold VTH | | - | - | +100 | mV | VOC=+1.2V |
| Differential Input L Threshold | -OW | VTL | -100 | - | - | mV | VOC=+1.2V |

Note1: Ta=25°C, Display pattern: All White


Date: 2021/01/13

Note2: Dimming function can be obtained by PWM signal from the display CN2. The recommended PWM signal is 100Hz~1000Hz.


3.2 Recommended Driving Condition for Backlight

| Item | Symbol | Min. | Тур. | Max. | Unit | Note |
|---------------------|--------|------|--------|------|------|----------------------|
| LED Forward Current | IF | | 150 | | mA | Ta=25°C |
| LED Forward Voltage | VF | | 21 | | V | IF=150mA, Ta=25°C |
| LED life time | | | 100000 | - | Hr | IF=150mA, Ta=25°C |


- The constant current source is needed for white LED back-light driving.
- When LCM is operated over 40°C ambient temperature, the IF should be follow :

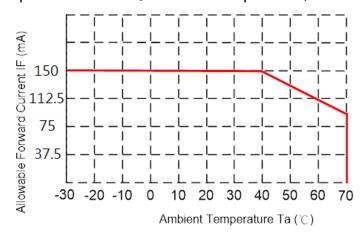

3.3 Block Diagram

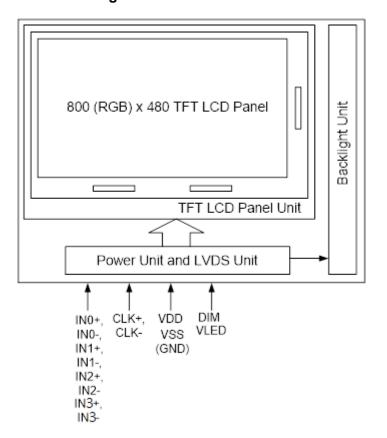

3.4 Pixel format

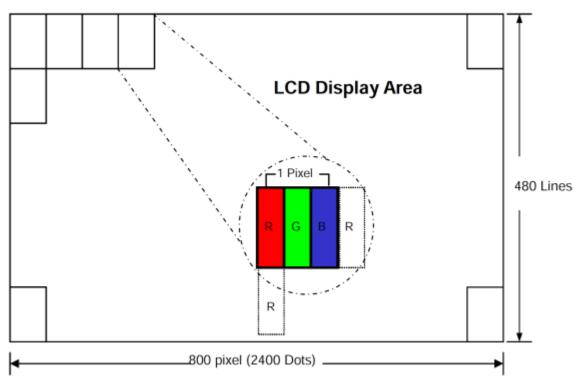



4. Input/Output Terminals


LVDS: CN1

| Item | Description |
|--------------------------------------|---|
| Manufacturer / Type | 20186-020E-11F(I-PEX0) or FI-SEB20P-HFE(JAE) |
| Mating Receptacle / Type (Reference) | 20197-*20U-F(I-PEX) or FI-S20S[for discrete Wire] , FI-SE20ME[for FPC](JAE) |

| Pin No. | Symbol | Function |
|---------|----------|--|
| 1 | VDD | POWER SUPPLY:3.3V |
| 2 | VDD | POWER SUPPLY:3.3V |
| 3 | VSS(GND) | Power Ground |
| 4 | VSS(GND) | Power Ground |
| 5 | INO- | Transmission Data of Pixels |
| 6 | IN0+ | Transmission Data of Pixels |
| 7 | VSS(GND) | Power Ground |
| 8 | IN1- | Transmission Data of Pixels 1 |
| 9 | IN1+ | Transmission Data of Pixels 1 |
| 10 | VSS(GND) | Power Ground |
| 11 | IN2- | Transmission Data of Pixels 2 |
| 12 | IN2+ | Transmission Data of Pixels 2 |
| 13 | VSS(GND) | Power Ground |
| 14 | CLK- | Sampling Clock |
| 15 | CLK+ | Sampling Clock |
| 16 | VSS(GND) | Power Ground |
| 17 | IN3- | Transmission Data of Pixels 3 |
| 18 | IN3+ | Transmission Data of Pixels 3 |
| 19 | NC | No connection |
| 20 | SC | Horizontal/Vertical display mode select signal |







Backlight driving:

Date: 2021/01/13

CN4:

| Item | Description |
|--------------------------------------|-----------------|
| Manufacturer / Type | FI-S6P-HFE(JAE) |
| Mating Receptacle / Type (Reference) | FI-S6S(JAE) |

| Pin No. | Symbol | Function | | | | |
|---------|--------|--|--|--|--|--|
| 1 | VL | Power supply of LED driving circuit | | | | |
| 2 | VL | Power supply of LED driving circuit | | | | |
| 3 | GNDL | Power Ground | | | | |
| 4 | GNDL | Power Ground | | | | |
| 5 | BLEN | LED Enable Pin (High: enable, Low: disable) | | | | |
| 6 | VPDIM | Adjust the LED brightness by PWM | | | | |

5. Timing Chart


5.1 TFT-LCD Input Timing

HV mode for 800x480

| Parameter | Symbol | Min. | Тур. | Max. | Unit |
|-------------------------|------------------|------|------|------|------|
| CLK frequency | FCLK | 25.2 | 25.4 | 35.7 | MHz |
| Horizontal display area | T _{HD} | | 800 | | CLK |
| HS period time | H | 860 | 864 | 974 | CLK |
| HS pulse width | T _{HPW} | 1 | 2 | 40 | CLK |
| HS back porch | T_{HBP} | | 32 | | CLK |
| HS front porch | T_{HFP} | 28 | 32 | 142 | CLK |
| Vertical display area | T_VD | | 480 | | Н |
| VS period time | T_V | 488 | 490 | 611 | Н |
| VS pulse width | T_{VPW} | 1 | 2 | 20 | Н |
| VS back porch | T_{VBP} | | 5 | | Н |
| VS front porch | T_{VFP} | 3 | 5 | 126 | Н |

DE mode for 800x480

| Parameter | Symbol | Min. | Тур. | Max. | Unit |
|-------------------------|-------------------------------------|------|------|------|------|
| CLK frequency | F _{CLK} | 25.2 | 25.4 | 35.7 | MHz |
| Horizontal display area | T_{HD} | | 800 | • | CLK |
| HS period time | T _H | 860 | 864 | 974 | CLK |
| HS blanking | T _{HFP} + T _{HBP} | 60 | 64 | 174 | CLK |
| Vertical display area | T_{VD} | | 480 | | Н |
| VS period time | T _V | 488 | 490 | 611 | Н |
| VS blanking | T _{VBP} + T _{VFP} | 8 | 10 | 131 | Н |

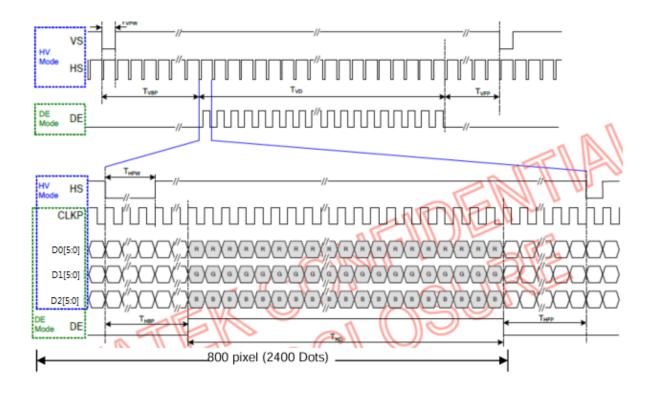

5-2 LVDS Signal

switching characteristics over recommended operating conditions (unless otherwise noted)

| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------|--|--|-----|---------------------|-----|------|
| t _{su} | Setup time, D0–D20 to CLKOUT↓ | 0 - 0 - F C Figure F | 5 | | | ns |
| t _h | Data hold time, CLKOUT↓ to D0–D20 | C _L = 8 pF, See Figure 5 | 5 | | | ns |
| t(RSKM) | Receiver input skew margin§ (see Figure 7) | $t_C = 15.38 \text{ ns } (\pm 0.2\%),$ Input clock jitter < 50 ps¶, | 550 | 700 | | ps |
| t _d | Delay time, CLKIN↑ to CLKOUT↓ (see Figure 7) | V _{CC} = 3.3 V, t _c = 15.38 ns (±0.2%), T _A = 25°C | 3 | 5 | 7 | ns |
| t _{en} | Enable time, SHTDN to phase lock | See Figure 7 | | 1 | | ms |
| t _{dis} | Disable time, SHTDN to off state | See Figure 8 | | 400 | | ns |
| t _t | Transition time, output (10% to 90% t _r or t _f) (data only) | C _L = 8 pF | | 3 | | ns |
| t _t | Transition time, output (10% to 90% t_Γ or $t_f)$ (clock only) | C _L = 8 pF | | 1.5 | | ns |
| t _W | Pulse duration, output clock | | | 0.50 t _C | · | ns |

PARAMETER MEASUREMENT INFORMATION

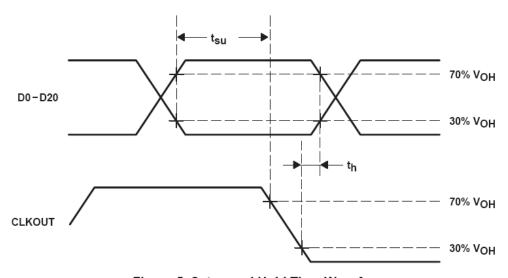


Figure 5. Setup and Hold Time Waveforms

[†] All typical values are at V_{CC} = 3.3 V, T_A = 25°C. § The parameter $t_{(RSKM)}$ is the timing margin available to allocate to the transmitter and interconnection skews and clock jitter. The value of this parameter at clock periods other than 15.38 ns can be calculated from t_{RSKM} = $t_{C}/14 - 550$ ps.

 $[\]P$ [Input clock jitter] is the magnitude of the change in input clock period.

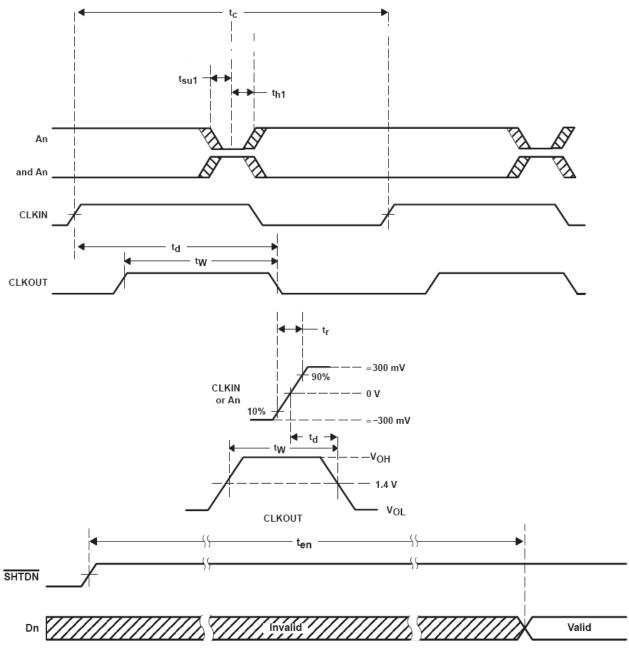


Figure 7. Enable Time Waveforms


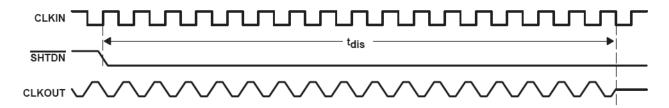


Figure 8. Disable Time Waveforms


8-BITS LVDS Input Data Format

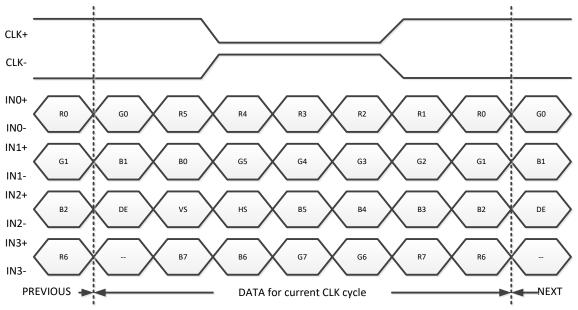

Note: R/G/B data 7: MSB. R/G/B data 0: LSB

| Note: R/G/B data 7: MSB, R/G/B data 0: LSB | | | | | |
|--|------------------------|--|--|--|--|
| Signal Name | Description | Remark | | | |
| R7 | Red Data 7 (MSB) | | | | |
| R6 | Red Data 6 | | | | |
| R5 | Red Data 5 | Red-pixel Data | | | |
| R4 | Red Data 4 | Each red pixel's brightness data consists of | | | |
| R3 | Red Data 3 | these 8 bits pixel data. | | | |
| R2 | Red Data 2 | triese o bits pixel data. | | | |
| R1 | Red Data 1 | | | | |
| R0 | Red Data 0 (LSB) | | | | |
| G7 | Green Date 7 (MSB) | | | | |
| G6 | Green Date 6 | | | | |
| G5 | Green Date 5 | Green-pixel Data | | | |
| G4 | Green Date 4 | Each green pixel's brightness data consists of | | | |
| G3 | Green Date 3 | these 8 bits pixel data. | | | |
| G2 | Green Date 2 | lilese o bits pixel data. | | | |
| G1 | Green Date 1 | | | | |
| G0 | Green Date 0 (LSB) | | | | |
| B7 | Blue Data 7 (MSB) | | | | |
| B6 | Blue Data 6 | | | | |
| B5 | Blue Data 5 | Blue-pixel Data | | | |
| B4 | Blue Data 4 | Each blue pixel's brightness data consists of | | | |
| B3 | Blue Data 3 | these 8 bits pixel data. | | | |
| B2 | Blue Data 2 | these oblis pixel data. | | | |
| B1 | Blue Data 1 | | | | |
| B0 | Blue Data 0 (LSB) | | | | |
| CLK+ | LV/DC Clock lands | | | | |
| CLK- | LVDS Clock Input | | | | |
| DE | Display Enable | | | | |
| VS | Vertical Sync Signal | | | | |
| HS | Horizontal Sync Signal | | | | |

5.3 POWER ON/OFF SEQUENCE

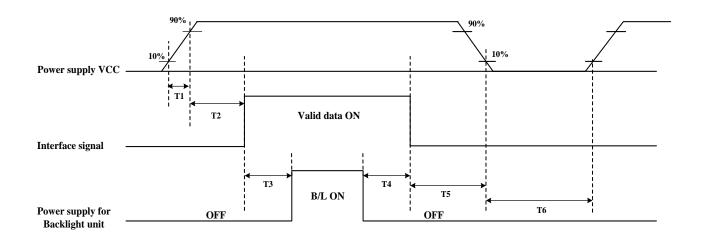

| Parameter | | Unit | | |
|-----------|------|------|------|------|
| Tarameter | Min. | Тур. | Max. | Omt |
| T1 | 1 | - | 2 | [ms] |
| T2 | 0 | 60 | 100 | [ms] |
| Т3 | 200 | - | - | [ms] |
| T4 | 200 | - | - | [ms] |
| T5 | 1 | 1 | - | [ms] |
| T6 | 1000 | - | - | [ms] |

6. Optical Characteristics

| Item | | Symbol | Conditio | Min | Тур | Max | Unit | Remark |
|----------------|---------|------------------|-------------|----------|-------|-------------------------|--------|-----------------------------|
| View Angles | | θТ | CR≧10 | 70 | 85 | - | Degree | Note 2 |
| | | θВ | | 70 | 85 | - | | |
| | | θL | | 70 | 85 | - | | |
| | | θR | | 70 | 85 | - | | |
| Contrast Ratio | 1 | CR | θ=0° | 800 | 1000 | 1 | | Left/right 0° Top/bottom 5° |
| Response Tim | е | $T_{ON+}T_{OFF}$ | 25 ℃ | - | 25 | 35 | | Note1 Note4 |
| | \^/b:4a | Х | | Тур-0.05 | 0.328 | - - - Typ+0.05 | | Note5 Note1 |
| | White | у | | | 0.347 | | | |
| | Red | Х | | | 0.615 | | | |
| Chromoticity | | у | | | 0.321 | | | |
| Chromaticity | Green | Х | | | 0.310 | | | |
| | | у | | | 0.563 | | | |
| | Blue | Х | | | 0.136 | | | |
| | | у | | | 0.098 | | | |
| Uniformity | | U | | 70 | | - | % | Note1 · Note6 |
| Luminance | | L | | 850 | 1000 | - | cd/m² | Note7 |

Test Conditions:

Date: 2021/01/13


- 1. $I_F= 150 \text{mA}$, the ambient temperature is $25 ^{\circ}\text{C}$.
- 2. The test systems refer to Note 1 and Note2.

Note 1: Definition of optical measurement system.


The optical characteristics should be measured in dark room. After 10 Minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

Note 1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/Field of view: 1° / Height: 500mm.)

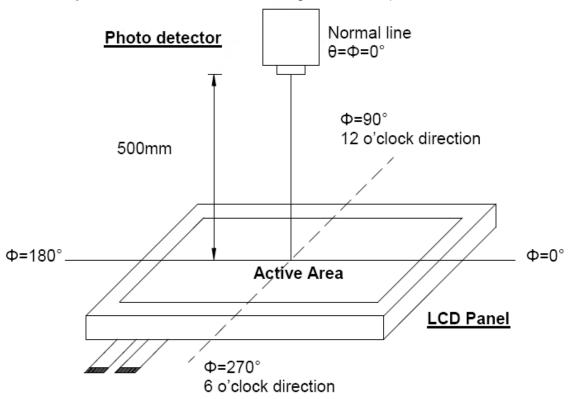


2: Definition of viewing angle range

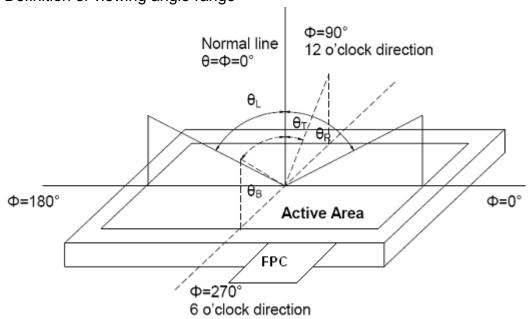

Note

Note 3: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (Ton) is the time between photo detector output intensity changed from 90% to 10%. And fall time (Toff) is the time between photo detector output intensity changed from 10% to 90%.

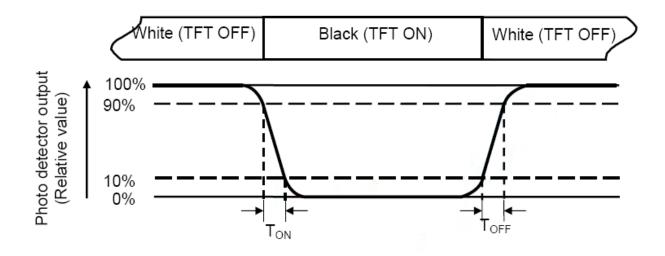

Note 4: Definition of contrast ratio


Note 5 : Definition of color chromaticity (CIE1931)

Color coordinated measured at center point of LCD.

Note 6 : All input terminals LCD panel must be ground when measuring the center area of the panel.

Note 7: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer to bellow figure). Every measuring point is placed at the center of each measuring area.

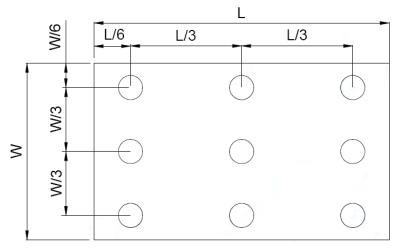

B_{max}: The measured maximum luminance of all measurement position. B_{min}: The measured minimum luminance of all measurement position.

7. Reliability Test Items

| Test Item | Test Conditions | Note |
|--|--|------|
| High Temperature Operation | 70±3°C , t=240 hrs | |
| Low Temperature Operation | -30±3°C , t=240 hrs | |
| High Temperature Storage | 80±3°C , t=240 hrs | 1,2 |
| Low Temperature Storage | -30±3°C , t=240 hrs | 1,2 |
| Storage at High Temperature and Humidity | 40°C, 85% RH , 240 hrs | 1,2 |
| Thermal Shock Test | -30°C (30min) ~ 85°C (30min) 50 cycles | 1,2 |
| Vibration Test (Packing) | Sweep frequency: 10 ~ 55 ~ 10 Hz/1min Amplitude: 0.75mm Test direction: X.Y.Z/3 axis Duration: 30min/each axis | 2 |

- Note 1: Condensation of water is not permitted on the module.
- Note 2: The module should be inspected after 1 hour storage in normal conditions (15-35°C, 45-65%RH).
- Note 3: The module shouldn't be tested more than one condition, and all the test conditions are independent.
- Note 4: All the reliability tests should be done without protective film on the module.

Definitions of life end point :

- Current drain should be smaller than the specific value.
- Function of the module should be maintained.
- Appearance and display quality should not have degraded noticeably.
- Contrast ratio should be greater than 50% of the initial value.

8. General Precautions

8-1 Safety

Liquid crystal is poisonous. Do not put it your month. If liquid crystal touches your skin or clothes, wash it off immediately by using soap and water.

8-2 Handling

- 1. The LCD panel is plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
- 2. The polarizer attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.
- 3. To avoid contamination on the display surface, do not touch the module surface with bare hands.
- 4. Keep a space so that the LCD panels do not touch other components.
- 5. Put cover board such as acrylic board on the surface of LCD panel to protect panel from damages.
- 6. Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.
- 7. Do not leave module in direct sunlight to avoid malfunction of the ICs.

8-3 Static Electricity

- 1. Be sure to ground module before turning on power or operation module.
- 2. Do not apply voltage which exceeds the absolute maximum rating value.

8-4 Storage

- 1. Store the module in a dark room where must keep at +25±10^oC and 65%RH or less
- 2. Do not store the module in surroundings containing organic solvent or corrosive gas.
- 3. Store the module in an anti-electrostatic container or bag.

8-5 Cleaning

- 1. Do not wipe the polarizer with dry cloth. It might cause scratch.
- 2. Only use a soft sloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.

8-6 Others

- 1.Do not keep the LCD at the same display pattern continually. The residual image will happen and it will damage the LCD. Please use screen saver.
- 2. AMIPRE will provide one year warrantee for all products and three months warrantee for all repairing products.

9. OUTLINE DIMENSION

